


# EPSILON ELECTRICAL

## E125LP-R-D-MS-28.05-Y-00-N/E125LP-T-D-MS-28.05-N-00-N

Applied Robotics I/O modules provide the exchanging of electrical signals (power, discrete, bus communication, etc.) to the end-of-arm tooling (EOAT) directly through the tool changer. Not only does this add efficiency to processes requiring frequent connection/disconnection of signals, but also reduces the probability of human errors introduced by manual changing of connections.

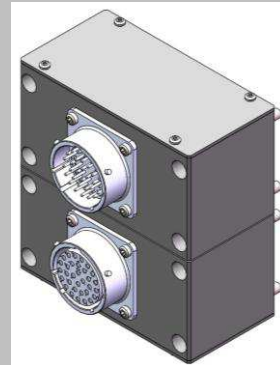


### SPECIFICATIONS


Property	Value	
	R1	T1
Connection Type	Mil-Spec Connector	
Rated Current	5 amps	
Rated Voltage	1000 volts	
Number of User Contacts	28	
Wire Gauge for Contacts	N/A	
Operating Temperature	5 - 60 °C (40 - 140 °F)	

### Advantages

- Electrically Insulated Housing Construction
- Easily Replaceable Spring Pin Contacts
- Integrated Wiring for Couple/Uncouple Sensing

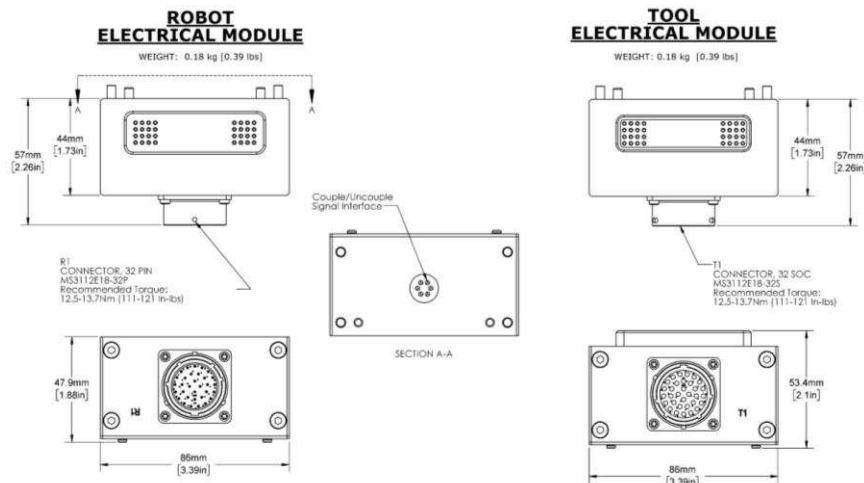

## PRODUCT DESCRIPTION

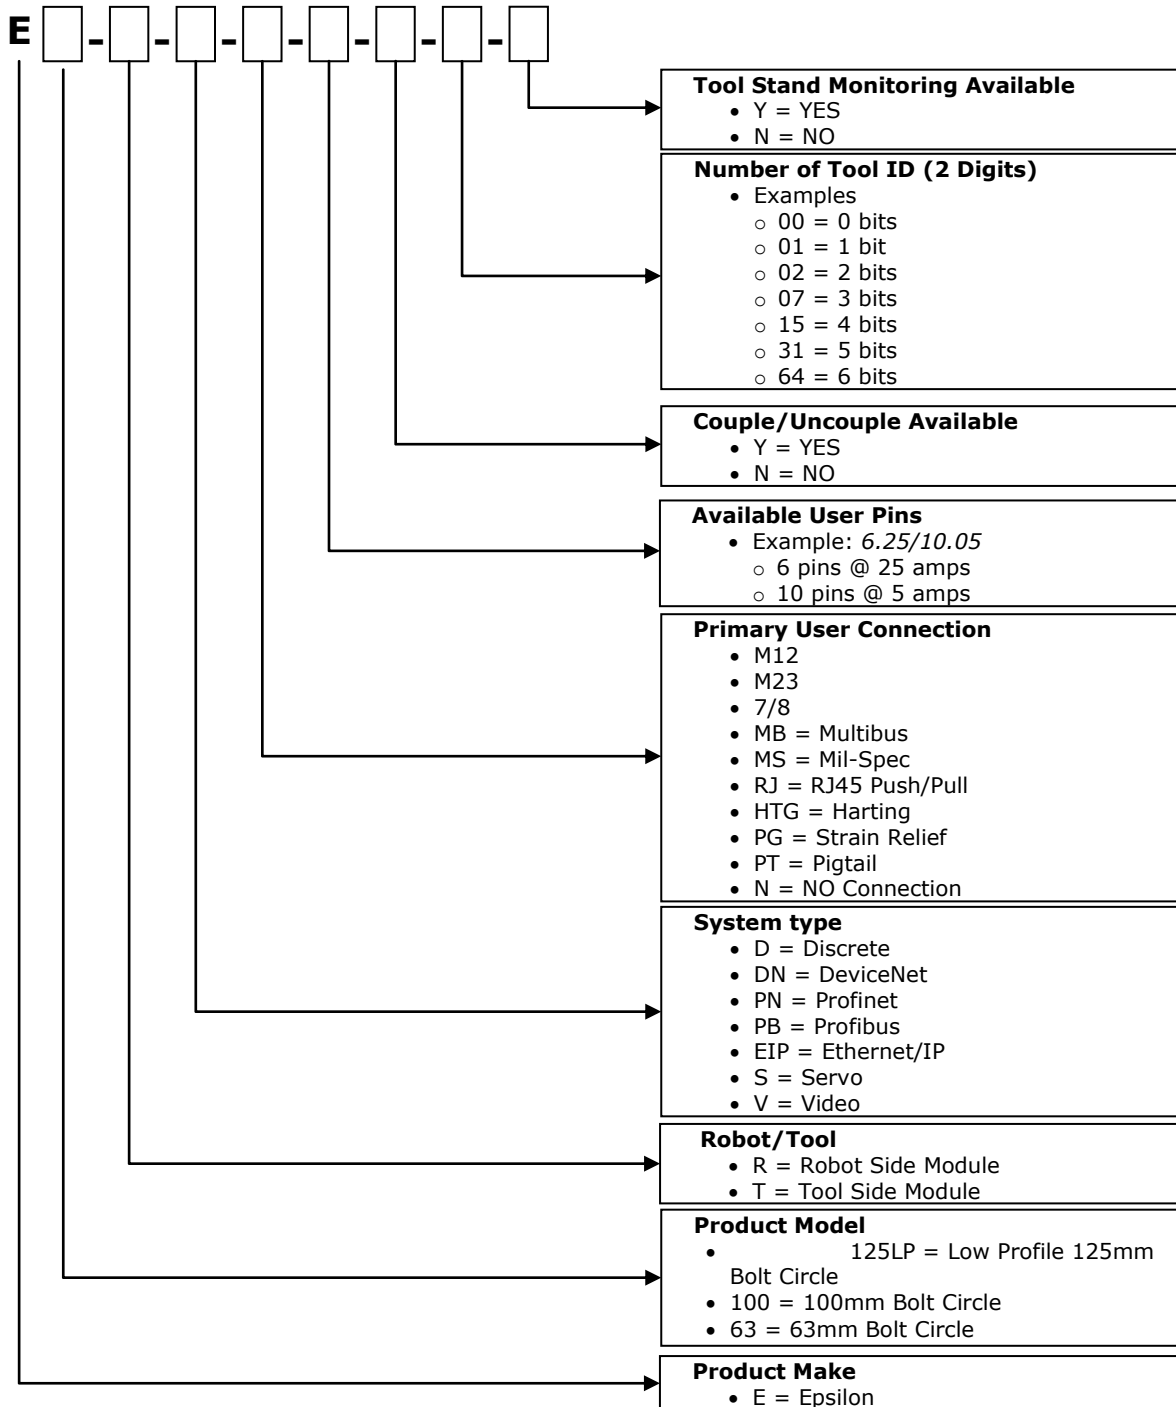

**Custom/Special: E- - - -S###**

648 Saratoga Road  
 Glenville, NY 12302 USA  
 Tel: 518 384 1000  
 Fax: 518 384 1200

Via Roma 141/143  
 8017 San Maurizio  
 d'Opaglio (NO) - Italy  
 Tel: +39 (0) 32 29 65 93  
 Fax: +39 (0) 32 29 50 686

[www.appliedrobotics.com](http://www.appliedrobotics.com)

